

pact[®] SYSTEM

HEMISPHERICAL CEMENTLESS CUPS

EVOLVING SAFETY



Brochure

Joint

Spine

Sports Med

MpacT System is a **comprehensive hemispherical cup platform** featuring different **shell and liner designs and materials** allowing for efficiently treating the majority of the clinical cases **from primary to revision** surgeries, according to patients' needs.



1 ADVANCED MATERIALS: OPTIMAL PRIMARY STABILITY AND SECONDARY FIXATION

The MpacT system makes use of different **advanced materials** and **manufacturing technologies**. Both MectaGrip and 3D Metal allow for designing and manufacturing implants featuring a **high friction coefficient**, increasing grip at the bone interface, thereby obtaining a **superior primary stability**.^[2] Moreover, the porous structure parameters in line with the **commonly accepted parameters**^[2,5] create a favorable environment for the bone.^[6,7,8,9] The efficient connection with the bone has been validated by means of an animal study in young sheep.^[2]



MectaGrip

MectaGrip is a **porous coating treatment** applied to the MpacT shells, consisting of a layer of commercially **pure titanium** deposited through a special **Vacuum Plasma Spray technique (VPS)**. Titanium porous coating allows for an **enhanced biocompatibility**, thanks to the **pure titanium composition** and **optimized porosity**.

3D Metal

3D Metal is an **advanced biomaterial structure** that is **finely engineered for the bone**. It is made of Titanium alloy (Ti6Al4V), and it is obtained by means of 3D printing technology, an innovative **one-step layer-by-layer** additive manufacturing process (not a coating).

This advanced technology allows for designing different **engineered 3D net structures** starting from a **CAD model** in a **precise, predictable and reproducible** manner. By means of a **single technology** it is possible to efficiently face most clinical cases, from **standard primary** to **complex revision** surgeries.



2 COMPREHENSIVE PRODUCT RANGE

SEVERAL SHELL VERSIONS



NO-HOLE
MectaGrip
from size 46 mm
to size 66 mm



TWO-HOLE
MectaGrip
from size 46 mm
to size 66 mm
3D Metal
from size 46 mm
to size 66 mm



MULTI-HOLE
MectaGrip
from size 46 mm
to size 76 mm
3D Metal
from size 46 mm
to size 76 mm
3D Metal MULTI-HOLE THIN
from size 48 mm
to size 60 mm

The MULTI-HOLE SHELLS allow for the use of cancellous bone screws in 13 to 17 locations (size dependent) on the dome and equatorial region



RIM-HOLE
MectaGrip
from size 56 mm
to size 76 mm

The RIM-HOLE SHELL allows for the use of cancellous and cortical bone screws



CANCELLOUS BONE SCREW
Ø 6,5 mm from L 15 mm to L 70 mm



CORTICAL BONE SCREW
Ø 4 mm from L 25 mm to L 55 mm
Compatible with Rim-hole only



COMPRESSION POLYAXIAL LOCKING SCREW
Ø 6,5 mm from L 15 mm to L 70 mm
Compatible with Multi-hole only (non-Thin version)

COBALT-FREE DOUBLE MOBILITY



DM CUP
MectaGrip coated High Nitrogen Stainless Steel
from size 42 mm to size 66 mm

DM LINER
UHMWPE Highcross

SENSITIN DM CONVERTER
TiN coated HNSS metal liner
(Titanium Nitride ceramic-like coating)
compatible with **all MpacT System cups**



MULTIPLE BEARING OPTIONS



Flat



Hooded



Offset 4 mm



Face-changing 10°

**UHMWPE
HIGHCROSS
LINERS**

3 FIRM LOCKING MECHANISM

MpacT system features **multiple bearing options** characterized by **optimized locking mechanisms**.



Highcross UHMWPE Liners

Clipping system + anti-rotation tabs



The **clipping system** for the **polyethylene liners** is placed outside the equatorial weight-bearing area in the thickest region of the liner. This design **reduces stresses** at the liner/shell interface and **minimizes the risk of the liner rim fracture** in case of impingement.^[1]

Therefore, the match between the **anti-rotation tabs** in the liner and the **indentations** on the shell **limits rotational micro-movements and potential backside wear**.^[2,3]

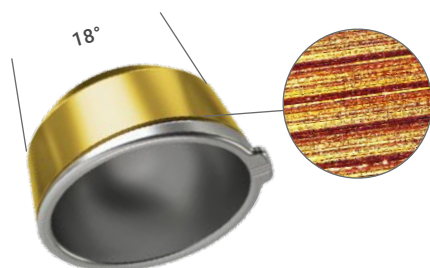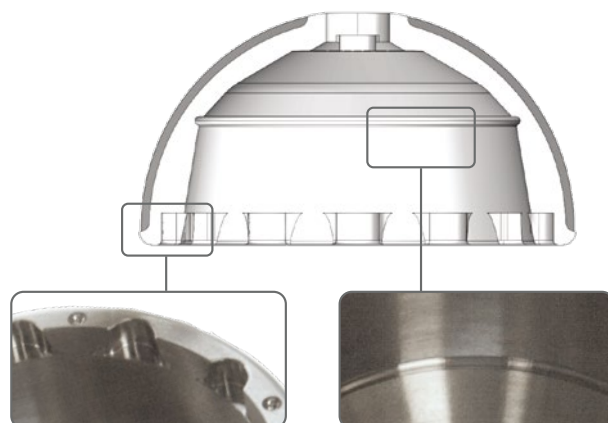

SensiTiN DM Converter

18° taper locking system + micro-threads

The SensiTiN DM Converter **tapered surface** shows the **same geometrical characteristics** as the clinically successful Medacta ceramic liner. **Micro-threads** are also present on the tapered surface to **increase stability** of the device.

REFERENCES

[1] Michael DR, MD, Review of the Evolution of the Cementless Acetabular Cup, ORTHOSuperSite December 1, 2008. [2] Data on file Medacta. [3] Y.K. Lee, K.C. Kim, W.L. Jo, Y.C. Ha, J. Parvizi, K.H. Koo. Effect of Inner Taper Angle of Acetabular Metal Shell on the Malseating and Dissociation Force of Ceramic Liner. The Journal of Arthroplasty 2017 Apr; 32(4): 1360-1362. [4] Y.K. Lee, J.Y. Lim, Y.C. Ha, T.Y. Kim, W.H. Jung, K.H. Koo. Preventing ceramic liner fracture after Delta ceramic-on-ceramic total hip arthroplasty. Archives of Orthopaedic and Trauma Surgery 2021 Jul; 141(7): 1155-1162. [5] L. Dall'Ava, H. Hothi, J. Henckel, A. Di Laura, P. Shearing, A. Hart. Comparative analysis of current 3D printed acetabular titanium implants. 3D Printing in Medicine 2019; 5:15. [6] P. Robotti, A. Sabbioni, L. Glass, B. George. Macroporous Titanium Coatings, by Thermal Plasma Spray, ITSC 2013, International Thermal Spray Conference, May 13 – 15, 2013, Busan, Korea. [7] J. E. Biernond et al, In vivo Assessment of Bone Ingrowth Potential of 3-Dimensional E-Beam Produced Implant Surfaces and the Effect of Additional Treatments by Acid-Etching and Hydroxyapatite Coating, J. Biomat. Appl, published on line January 27, 2011, 0885328210391495. [8] R. Ferro de Godoy et al., In vivo Evaluation of Titanium Macro-Porous Structures Manufactured Through an Innovative Powder Metallurgy Approach. Proceedings eCM XIII: Bone Fixation, Repair & Regeneration, June 24–26, 2012, Davos, Switzerland. [9] A. Goodship et al, In-vivo Assessment of the Ingrowth Potential of Engineered Surface Topographies Produced by Spark Plasma Sintering, Proceedings 9th World Biomaterial Congress, June 1-5, 2012, Chengdu, China.

All trademarks and registered trademarks are the property of their respective owners.

This document is intended for the US market.

Please verify registration status and availability of the devices described in this document with your local Medacta representative.



Medacta International
Strada Regina, 34 - 6874 Castel San Pietro - Switzerland
Phone +41 91 696 60 60 - Fax +41 91 696 60 66
Info@medacta.ch - www.medacta.com

Medacta USA
6640 Carothers Pkwy - Franklin, TN 37067
Phone +1 866 830 1063 - Fax +1 312 896 9138
info@medacta.us.com

MpacT® System Leaflet
ref: 99.70SYS.11US
rev. 00
Last update: August 2022

swiss
made

